

WESTERN POTHOLE REPAIR


HIGH PERFORMANCE COMMERCIAL GRADE COLD-MIX



WESTERN POTHOLE REPAIR

Western Pothole Repair is a specially formulated bituminous patching mix, designed to be applied from -20°C to 40°C without the necessity of paving equipment or specialized personnel. After proper compaction the pothole is immediately ready for traffic.

This product was specifically developed to meet Manitoba Infrastructure Specifications (APL104-1) it utilizes the latest technology and proprietary additives that improve cohesion and adhesion properties while maintaining stockpile workability in excess of one year.

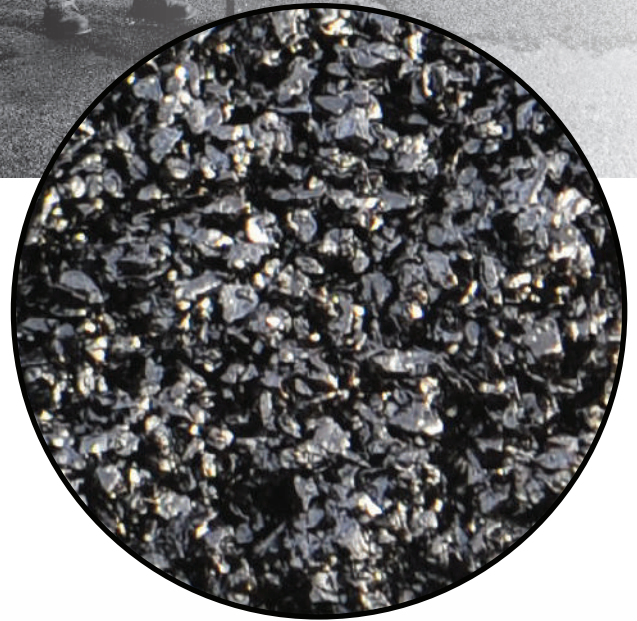

FEATURES

- ✓ READY TO USE
- ✓ NO MIXING, TRACKING OR HEATING
- ✓ MAINTAINS STOCKPILE WORKABILITY FOR 1 YEAR +
- ✓ WATER RESISTANT
- ✓ ENVIRONMENTALLY SAFE
- ✓ WORKABLE IN ALL SEASONS

FOR BEST RESULTS

- Use a broom to sweep debris from the pothole/ utility cut.
- Apply Western Pothole Repair in increments to avoid over filling, spread evenly within the depression.
- Use a tamper or other method to compress each layer until even with existing surface.
- For deep holes, fill using 2 inch layers and compress each layer before adding another one.
- Avoid parking on the repair for the first 30-60 days.

PRODUCT SPECIFICATIONS

Western Pothole Repair contains 100% crushed mineral aggregate with the following properties:

Sieve Size	% Passing
12.5 mm	100%
9.5 mm	90-100%
4.75 mm	50-85%
2.0 mm	5-30%
425 µm	0-5%
75 µm	0-2%

Test	Specification	Method
Absorption	3% max	ASTM C127
LA Abrasion	40% max	ASTM C136

AVAILABLE IN: 22.7 kg Bags Pallets of bags Bulk



WESTERN ASPHALT
products

Alberta
(780)796-3437

Saskatchewan
(306)271-0727

Manitoba
(204)725-9538

Online
WesternAsphalt.ca